




FIBREroll

TEXTILE ROLLER FIRE CURTAIN



FIRE RESISTANCE:
E 15 – E 180; EW 15 – EW 180

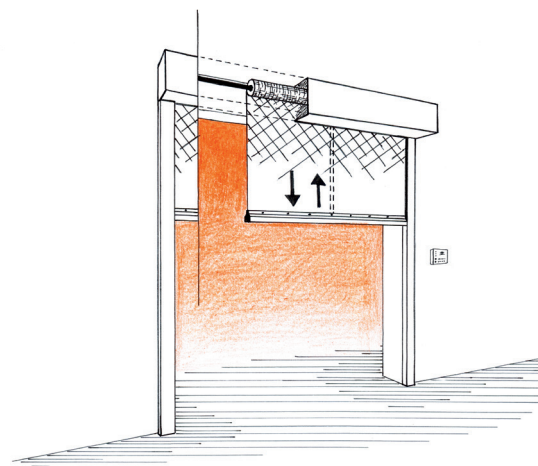

PRODUCT DESCRIPTION

- › Made of special fire-resistant textile 0.7 thick, reinforced by stainless steel wires with surface coating and aluminium reflecting coating (foil) to increase fire resistance
- › **Manufacturer's recommended maximum overall dimensions up to 18 × 7 m (W × H)** according to fire resistance; larger dimensions are subject to consultation
- › Minimum total width 1,000 mm
- › Designed for face fixing or fixing between assembly (possible combination of both), fixing into concrete, masonry, or steel profiles with required fire resistance
- › **Dimensions (W × H) of the box** (depends on the size and fire resistance of the curtain): **150 × 150 mm, 200 × 200 mm** or **230 × 230 mm, or 260 × 260 mm**
- › Very light (curtain of 3 × 3 m approx. 140–150 kg, curtain of 6 × 6 m approx. 300–350 kg)
- › Controlled electrically by means of a tube drive (230 V)
- › Closing speed is approximately 100 mm/s
- › Steel parts are made from galvanized metal, standardly powder coated in **RAL 9006** (white aluminium), **RAL 9010** (white) or **RAL 3000** (fire red), alternatively, atypical coating

according to the RAL sampler possible at the customer's request

- › **Control panel AOP (AVAPS Operation Panel) including emergency closure button**
 - › System designed in accordance with EN 14637
 - › Ensures electronic control of individual curtain functions
 - › „Fail safe“ safe gravity closure even in the event of a power failure, status monitoring and fault evaluation (short circuit, cabling failure, undervoltage, preload,...)
 - › Fire detection options: local Fire Alarm System (potential-free contact) or local detection (3 or 6 sensors depending on the closure width)
 - › Contains its own back-up power source (accumulator) to prevent unwanted closing of the curtain in case of power failure, including a cyclic charging system that extends battery life
 - › According to customer requirements can be supplemented with:
 - key switch, lockable button
 - optical and acoustic signalling
 - signalling of conditions to external devices
 - emergency open button
 - optical barriers

CERTIFICATION

Fire curtain **FIBREroll** has been successfully tested in fire testing centre FIRES s.r.o., classified as per EN 15269-11 and EN 13501-2, assessed as per 13241+A2 and EN 16034 and is covered by CE certificate No. 1396-CPR-0154 / 1396 CPR 0153 / 1396-CPR-0228 – according to required dimensions and fire resistance. / For more information, contact: projekce@avaps.cz.

Manufacturer issues declaration of performance for individual orders in compliance with Regulation of the European Parliament and Council (EU) No. 305/2011.



230 V AC



max. 460 W



100–150 mm/s

+50 °C




-10 °C




TECHNICAL INFORMATION


VIEW - FIXING INTO THE OPENING (FIXED BETWEEN)

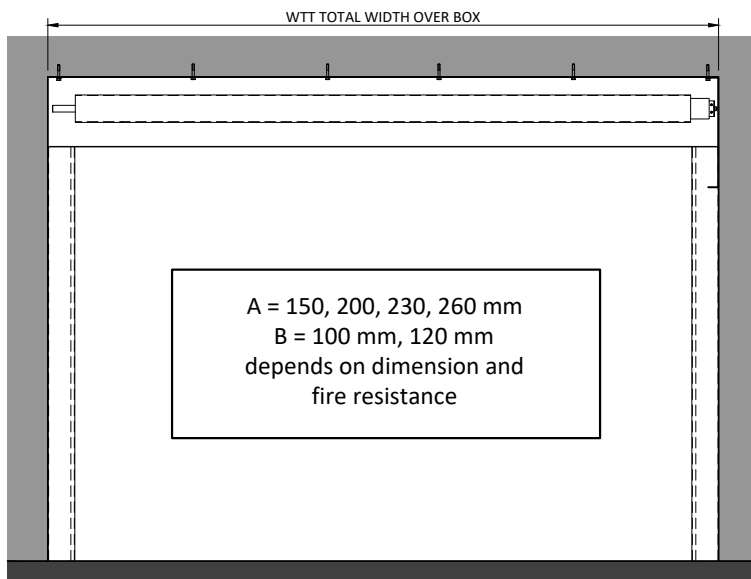


TYPICAL SECTION
FIXED BETWEEN

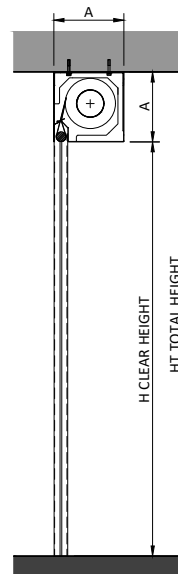


TYPICAL SECTION
FACE FIXED

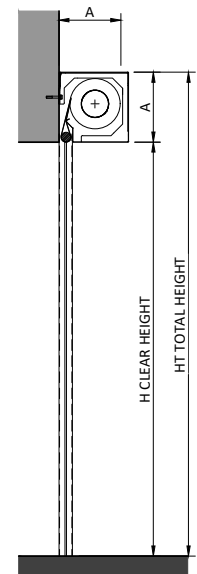


PLAN VIEW - FIXING INTO THE OPENING (FIXED BETWEEN)

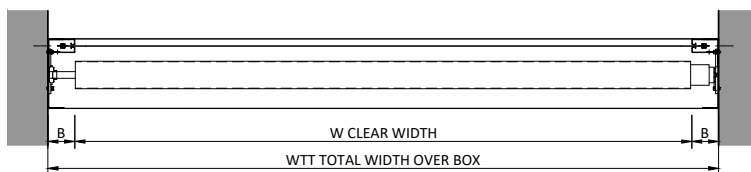

PLAN VIEW - FIXING ONTO THE OPENING (FACE FIXED)

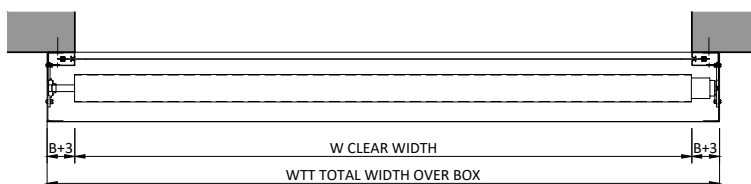

SIDE GUIDE FIXING DETAIL
FIXED BETWEEN FACE FIXED



This drawing and copyright belong to AVAPS s.r.o. Do not copy without AVAPS s.r.o. authorisation.

MAINTENANCE AND REPAIR SERVICES

We provide professional warranty and post-warranty service and revisions according to applicable laws for all our products.

Contact: +420 777 911 770 / service@avaps.eu

